

ACE-4535AP

360 W 2U ATX Power Supply


360W



PFC

CB c **UL** US

Dimensions

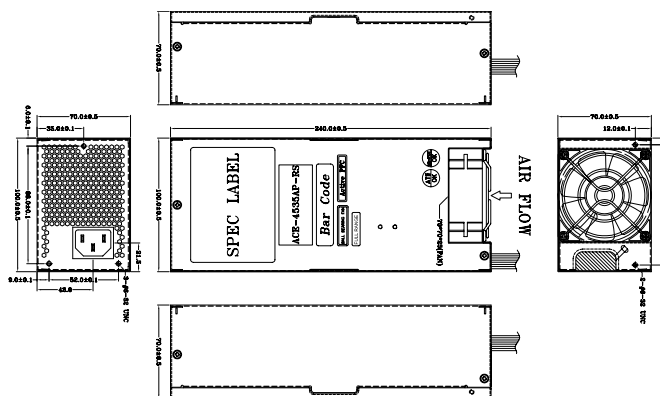

Specifications

Input Type	90~264 VAC Full Range, 47~63 Hz					
	+3.3 V	+5 V	+12 V	+24 V	-12 V	-5 Vsb
Overvoltage	5 A (0.3 A min.)	16 A (1 A min.)	10 A (0.5 A min.)	6 A (0 A min.)	1 A (0 A min.)	1.5 A (0 A min.)
Efficiency	75 %					
Temperature	0 °C~ 50 °C (Operating), -20 °C~ 80 °C(Storage)					
MTBF(hrs)	100,000					
Output Connector	21 x 20+4-pin ATX 1 x 4-pin 12 V CPU 3 x HDD 2 x SATA 1 x 5 V (P10)					
Dimensions	240 x 100 x 70 (mm)					

Ordering Information

Part No.	Description
ACE-4535AP-RS	360W 2U ATX Power Supply with active PFC

ACE-4530AP

300 W 2U ATX Power Supply

300W




PFC



Back View

Dimensions

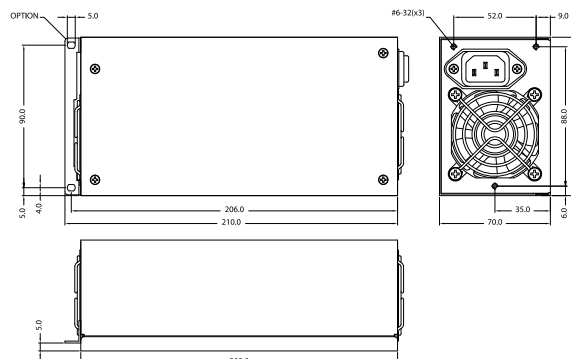

Specifications

Input Type	90 ~ 264 VAC Full Range					
	+5 V	+12 V	-12 V	-5 V	+3.3 V	+5 Vsb
Output	35 A	16 A	1 A	0.5 A	20 A	2 A
Efficiency	63 %					
Temperature	Operating : 0 °C ~ 50 °C Storage : -20 °C ~ 80 °C					
Output Connector	1 x 20+4-pin ATX 1 x 4-pin 12 V CPU 4 x HDD 2 x FDD 2 x SATA 1 x 5 V (P10)					
Dimensions	200 x 100 x 70 (mm)					

Ordering Information

Part No.	Description
ACE-4530AP-RS	300 2U AC-DC ATX Power Supply, with PFC

Best solution for the RACK-1350GATX 2.0 standard w/ new 20+4 Meets ATX revision 2.0, with 20+4-pin ATX power and SATA connector