


ACE-715VX/717CX 1U ATX 12V/24V DC Input

170W



Input Type	9 ~ 18VDC (ACE-715VX) 19 ~ 32VDC (ACE-717CX)					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
ACE-715VX	6A	16A (1A min)	10A (1A min)		1A	1.5A
ACE-717CX	6A	8A (1A min)	8A (1A min)		0.5A	1A
Efficiency	70% (ACE-715VX), 75% (ACE-717CX)					
Temperature	Operating : 0 ~ 70°C (-20 can be start up) Storage : -40 ~ 75°C					
MTBF(hrs)	100,000					
Output Connector	5VSB & PS_ON cable					
Dimensions	198 x 97 x 39 mm					

Dimensions

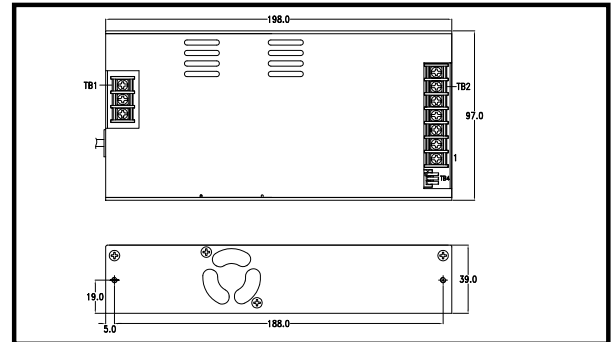

Optional 1 Embedded Solution



PN: CB-643EB-RS

30 cm DC cable to CPU card with 4-pin 12 V CPU, HDD and SATA connectors

Ordering Information

Part No.	Description
ACE-715VX-RS	157W 12V DC input ATX Power Supply
ACE-717CX-RS	170W 24V DC input ATX Power Supply

Optional 2 ATX Backplane Solution



PN: CB-717BP-RS

30 cm DC cable for ACE-715VX/717CX power to backplane, with 20-pin ATX, HDD and SATA connector