

ACE-716A/AP

150W 1U Type AT Power Supply

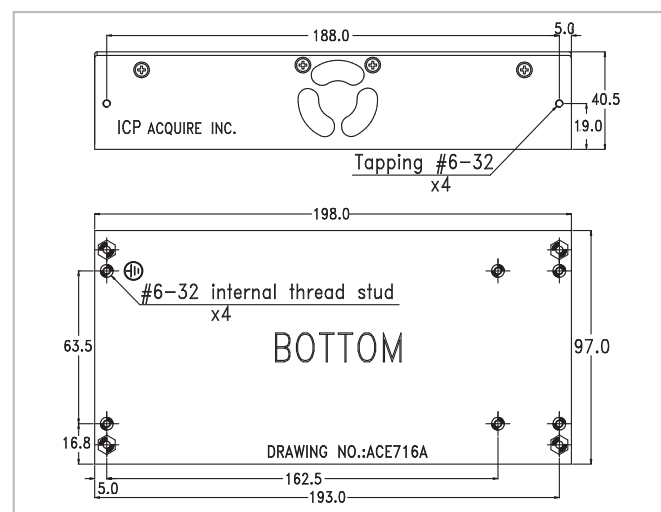

Specifications

Input Type	85 ~ 135VAC, 180 ~ 265VAC Auto Range (ACE-716A) 85 ~ 265VAC Full Range (ACE-716AP)			
	+5V	+12V	-5V	-12V
Output Voltage	18A (1A min)	4A	0.5A	1A
Efficiency	75%			
Temperature	Operating: -20°C ~ 70°C (50°C ~ 70°C derating curve) Storage: -20°C ~ 85°C			
MTBF (hrs)	149,000			
Output Connector	Optional cable			
Dimensions	198 x 97 x 40.5 mm			

Ordering Information

Part No.	Description
ACE-716A-RS	150W AC-DC AT Power Supply
ACE-716AP-RS	150W AC-DC AT Power Supply, with PFC

Dimensions (Unit: mm)

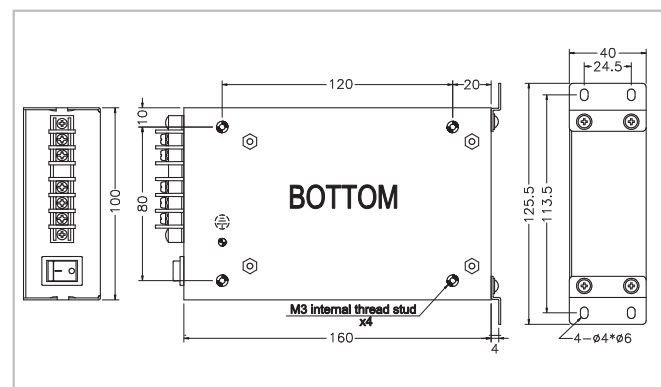


Option 1	Embedded Solution	Option 2	ATX Backplane Solution
	PN: CB-716EB-RS 30 cm DC cable to CPU card with 4-pin 12 V CPU, HDD and SATA connectors		PN: CB-716BP-RS 30 cm DC cable to backplane with 20-pin ATX, HDD, SATA and HDD connectors
Option 3	AT P8P9 Backplane Solution	Option 4	AT P8P9 Backplane Solution
	PN: CB-716P8P9-RS 30 cm DC cable AT power to P8P9 with HDD and SATA connectors		PN: CB-643EC-RS 20 cm AC input cable with I/O connector and fuse

ACE-540A

40W AC-DC AT Power Supply


Dimensions (Unit: mm)



Specifications

Input Type	85 ~ 264VAC Full Range				
	+5V	+12V	-5V	-12V	+24V
Output Voltage					1.7A
Efficiency	70%				
Temperature	Operating: -20°C ~ 70°C (50°C ~ 70°C derating curve) Storage: -40°C ~ 85°C				
MTBF (hrs)	370,000				
Output Connector	N/A				
Dimensions	161 x 100 x 40 mm				

Ordering Information

Part No.	Description
ACE-540A-RS	40W AC-DC AT Power Supply, only output +24V

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Embedded
Computing
Solutions

4

Automation
Control

5

ORing
Network
Communication

6

Power Supply/
Peripherals

7

Panel
Solutions
Introduction