ICP Electronics Australia Pty Ltd
Tel: 02 9457 6011
sales@icp-australia.com.au
www.icp-australia.com.au

1U AC Input ATX Type

ACE-818APM

180W 1U Type ATX Power Supply

180W

Medical

PFC CB cULus VDE CCC

Specifications

Input Type	90 ~ 265 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
	16.8 A (0.3 A min)	12 A (0.5 A min)	12 A (1.5 A min)		0.8 A	2 A
Efficiency	68%					
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
MTBF (hrs)	100,000					
Output Connector	20-pin ATX, 4-pin 12 V CPU, 2 x FDD, 3 x HDD					
Dimensions	190 x 81.5 x 40.5 (mm)					

Dimensions (Unit: mm)

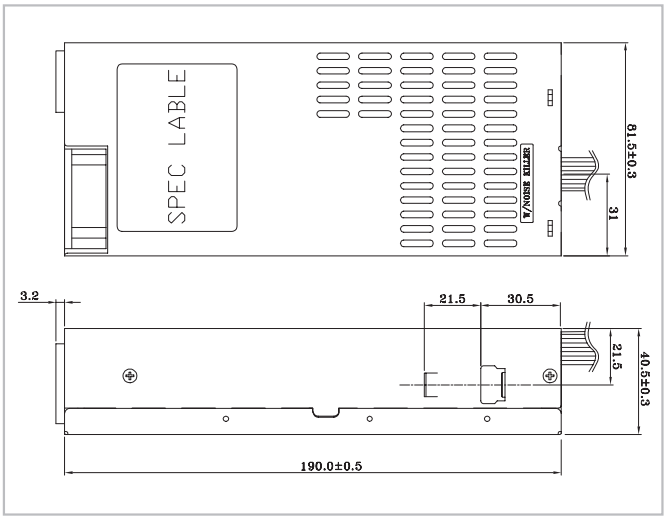

Ordering Information

Part No.	Description
ACE-818APM-RS	180W AC-DC 1U ATX Power Supply with PFC, meets Medical standard

ACE-A627A

270 W 1U Type ATX Power Supply

270W

PFC ErP 5Vsb < 1W Input 80 PLUS

CB cULus CCC FC CE

Specifications

Input Type	90~264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	16 A (0.5 A min.)	18 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80%					
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
MTBF (hrs)	100,000 hr					
Output Connector	20-pin ATX, 4-pin 12 V, FDD and three HDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

Dimensions (Unit: mm)

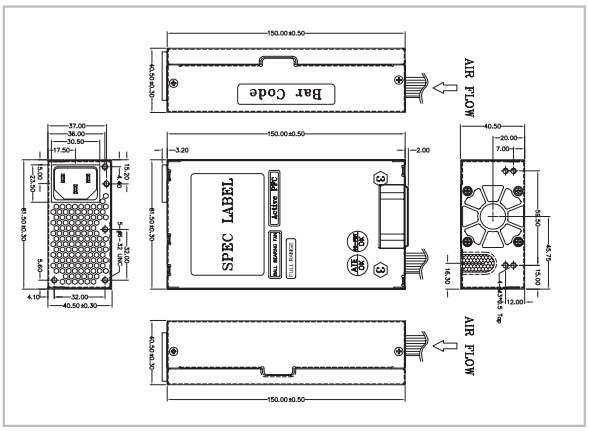

Ordering Information

Part No.	Description
ACE-A627A-RS-R11	270W AC-DC 1U flex ATX Power Supply, with PFC/ ErP, meet 80 PLUS